



CONTRACT

CONTRACT LEATHER IS UV AND FIRE RETARDENT TREATED, DIRT RESISTANT AND PROVIDES HIGH LIGHT FASTNESS AND DURABILITY FOR USE IN A WIDE VARIETY OF COMMERCIAL APPLICATIONS.



pelleleathers.com.au
+ 61 2 9460 9222

CONTRACT COLOURS



AMSTERDAM 5029



BARCELONA 5027



BLACKPOOL 5021



CAIRO 5028



CASABLANCA 5024



COPENHAGEN 5033



CORSICA 5054



DOLOMITE 5046



GENOVA 5047



GLASGOW 5036



LAGOS 5026



LONDON 5048



MADRID 5045



MALAGA 5034



MIAMI 5025



MOSCOW 5040



PARIS 5038




PRAQUE 5020




PROVENCE 5041




RIGA 5030

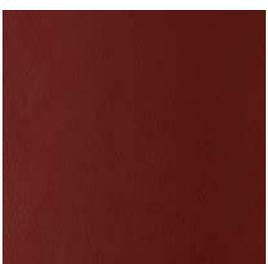

ROMA 5043

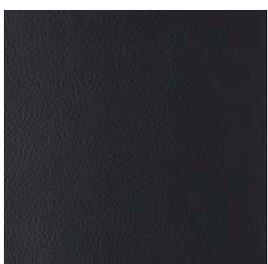

ROTTERDAM 5022

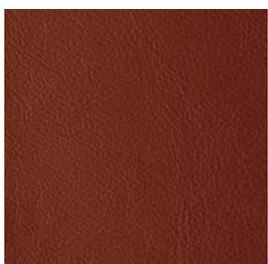

SANTA FE 5044




TIFLIS 5059




TOKYO 5051


CONTRACT PERFORATION OPTIONS

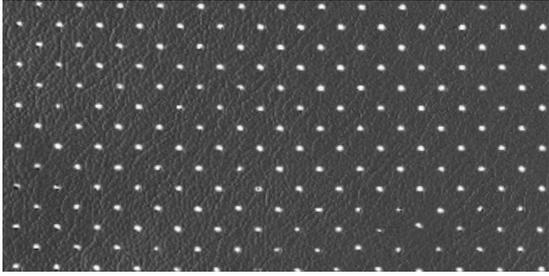


MK 1

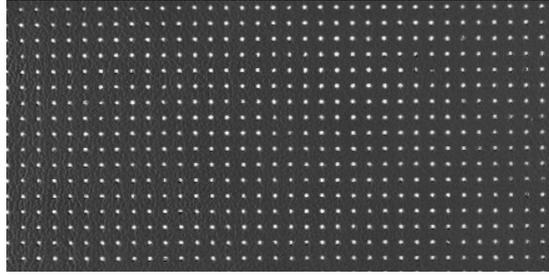


MK 2

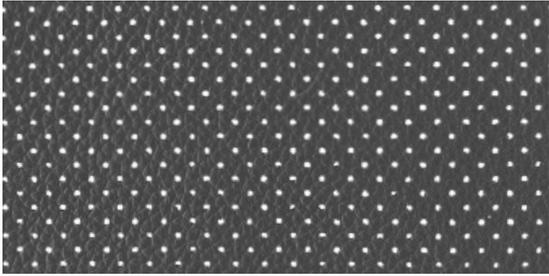

MK 3

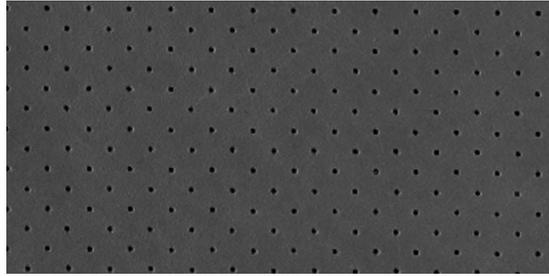

PINPOINT

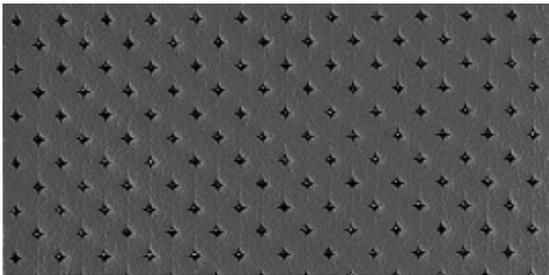

PIQUE

CONTRACT COLOURS

SUBTLE GRAIN, PIGMENTED

The Contract range is a specifically developed pigmented leather produced with a UV treated, dirt resistant and fire retardant finish, providing high light fastness and durability. Contract can be used in a wide variety of applications including contract upholstery, door covering and wall paneling, railway, aviation, automotive and marine use. The Contract range can also be supplied perforated in all colours.

APPLICATIONS	Upholstery, Wall Panelling, Aviation, Railway, Marine
HIDE SIZE (IN SQM)	5.5
THICKNESS (IN MM)	1.0-1.2

CHARACTERISTIC	TEST METHOD	TEST RESULTS
COLOUR FASTNESS TO RUBBING	EN ISO 11640	Dry 4 - 5
	EN ISO 11640	Wet 4 - 5
FLEXING ENDURANCE	DIN 53351	50,000 flexes (no finish damage cracks)
TEAR STRENGTH	ISO 3377-1	>20N
LIGHT FASTNESS	EN ISO 105-B02	6
FINISH ADHESION	EN ISO 5402/IUF 470	3.5 N/cm
FLAME RESISTANCE	AS/NZS 1530.3	Ignitability 15 Spread of Flame 0 Heat Evolved 1 Smoke Developed 5
	AS/NZS 3837	meets BCA Group 1
	DIN EN 1021:1 and EN 1021:2 BS 5852:1 and BS 5852:2 ISO 8191:1 and ISO 8191:2 IMO A.652	

ENVIRONMENTAL

- All wastewater is cleaned in a biological treatment plant, recycled and reused. No PCP, Chrome VI, CADMIUM, FORMALDEHYDE or AZO - Col Dyes are used in the tanning process. All dyes and pigments (finishes) are solvent free ie. water based
- State of the art application technology optimizes the finishing process and greatly reduces the rate of airborne emissions
- Regular inspections are conducted to ensure that quality and environmental standards are maintained at all times
- Low VOC product

CARE OF LEATHER

- Do not place leather in direct sunlight
- Ensure a minimum of 80cm between furniture and heating source
- Avoid contact of leather with sharp objects
- Regularly clean and dust your leather with a clean dry cloth
- Remove food spills immediately. Do not scrub hard
- Avoid using harsh chemicals and / or cleaners that are oil or solvent based
- Only clean leather with approved upholstery leather cleaners in accordance with the manufacturer's instructions