



## COLORADO

A SEMI-ANILINE LEATHER FINISHED WITH A BLEND OF WAXES AND OILS TO GIVE AN AGED AND LIGHTLY DISTRESSED FINISH.

## COLORADO COLOURS



BRAZIL

27060



CHINTZ

21780



MACCHIATO


33120



THATCHED

28270

## COLORADO PERFORATION OPTIONS

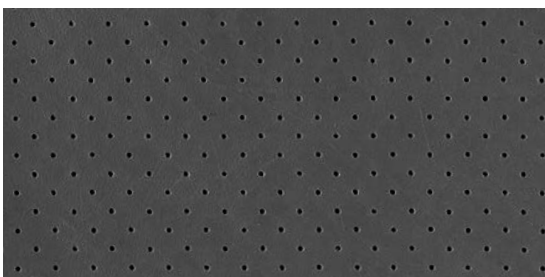

PINPOINT



# COLORADO DETAILS

## SMOOTH GRAIN, SEMI - ANILINE

Colorado is a Semi-Aniline leather finished with a blend of oils and waxes to achieve a crackled, distressed finish with a slight pull up effect. Colorado is suitable for both residential and commercial applications.

---

|                    |                            |
|--------------------|----------------------------|
| APPLICATIONS       | Upholstery, Wall Panelling |
| HIDE SIZE (IN SQM) | 4.6                        |
| THICKNESS (IN MM)  | 1.0-1.2                    |

| CHARACTERISTIC             | TEST METHOD                 | TEST RESULTS                               |
|----------------------------|-----------------------------|--|
| COLOUR FASTNESS TO RUBBING | EN ISO 11640                | Dry 4                                      |
|                            | EN ISO 11640                | Wet 4                                      |
| FLEXING ENDURANCE          | ISO 5402                    | 30,000 flexes<br>(no finish damage cracks) |
| TEAR STRENGTH              | ISO 3377-1                  | >30N                                       |
| LIGHT FASTNESS             | EN ISO 105-B02              | 5  |
| FINISH ADHESION            | EN ISO 5402/IUF 470         | 3.5 N/cm                                   |
| FLAME RESISTANCE           | AS/NZS 1530.3               | Ignitability 16                            |
|                            |                             | Spread of Flame 0                          |
|                            |                             | Heat Evolved 3                             |
|                            |                             | Smoke Developed 3                          |
|                            | AS/NZS 3837                 | Meets BCA Group 1                          |
|                            | DIN EN 1021:1 and EN 1021:2 |  |

---

### ENVIRONMENTAL

- All wastewater is cleaned in a biological treatment plant, recycled and reused. No PCP, Chrome VI, CADMIUM, FORMALDEHYDE or AZO – Col Dyes are used in the tanning process. All dyes and pigments (finishes) are solvent free ie. water based
- State of the art application technology optimizes the finishing process and greatly reduces the rate of airborne emissions
- Regular inspections are conducted to ensure that quality and environmental standards are maintained at all times
- Low VOC product

---

### CARE OF LEATHER

- Do not place leather in direct sunlight
- Ensure a minimum of 80cm between furniture and heating source
- Avoid contact of leather with sharp objects
- Regularly clean and dust your leather with a clean dry cloth
- Remove food spills immediately. Do not scrub hard
- Avoid using harsh chemicals and / or cleaners that are oil or solvent based
- Only clean leather with approved upholstery leather cleaners in accordance with the manufacturer's instructions