



## VERSATILE VINYL

A FLAME RETARDANT COATED FABRIC PRODUCED IN EUROPE WITH THE LATEST INNOVATIVE TECHNOLOGY. FEATURING A SOFT HANDLE AND AN APPEARANCE SIMILAR TO REAL LEATHER.

---



[pelleleathers.com.au](http://pelleleathers.com.au)  
+ 61 2 9460 9222

# VERSATILE VINYL COLOURS



ADRIFT

4135



ALPHA

4116



AROMA

4108



ARTISTRY

4132



BAKED

4122



BERMUDA

4134



BETA

4128



CALICO

4109



CAMISOLE

4105



CANOE

4121



CENTURION

4117



CHARDONNAY

4107



CHIANTI

4127



CONSERVATORY

4113



CRISP

4137



DELTA

4115



DEPTH

4129



ECCO

4104



ELK

4103



GAMMA

4119



GOLD

4102



GONDOLIER

4124



KAPPA

4125



KIMONO

4126



MAJESTIC

4131



MALACHITE

4114



MEDALLION

4104



MOLLUSC

4110



OMEGA

4112



OPERA

4133

## VERSATILE VINYL COLOURS



PRIMAL

4111




SOOT

4120



SPRITZ

4106



TAVERN

4118



TOMAHAWK


4123



VECTOR

4136

## VERSATILE VINYL PERFORATION OPTIONS

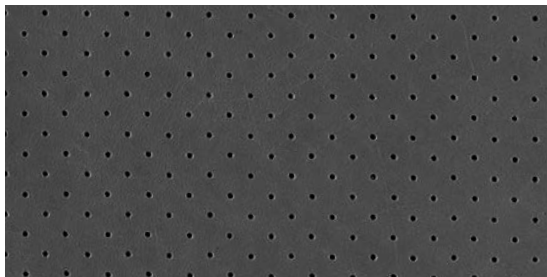

PINPOINT

## VERSATILE DETAILS

### VINYL

Versatile is a flame retardant coated fabric produced in Europe with the latest innovative technology. It has a soft handle and an appearance similar to real leather.

Versatile contains new polymers that are even more resistant to sun exposure, weathering and salt water. It has an anti-bacterial protection and is ideally suited and designed for all types of interior upholstery.

Additionally, Versatile has superior technical qualities / specifications for outdoor and marine applications. The elastic backing, made of polyester, allows it to adapt to all forms of upholstery with the utmost assurance of strength and durability.

---

APPLICATIONS	Residential, hospitality, healthcare, aged care, office, contract, marine and outdoor upholstery.	
ROLL WIDTH	140cm	
WEIGHT	540 +/- 10 g/m <sup>2</sup>	
COMPOSITION	76% PVC - 22% PES - 2% PU	
CHARACTERISTIC	TEST METHOD	TEST RESULTS
ABRASION RESISTANCE	ISO 5470-2	60,000 (MARTINDALE)
COLOUR FASTNESS TO DRY RUBBING	ISO 105-X12	4/5
COLOUR FASTNESS TO WEY RUBBING	ISO 105-X12	4/5
COLOUR FASTNESS TO LIGHT	ISO 105 Bo2	6
ADHESION	ISO 2411	> 30 (N)
TENSILE STRENGTH	UNI EN ISO 1421	long. 600 trasv. 240 (N)
ELONGATION AT BREAK	UNI EN ISO 1421	long. 57 Trasv. 110 (%)
TEAR STRENGTH	UNI EN ISO 4674	long. 30 trasv. 30 (N)
BENDING STRENGTH	UNI 4818-13	100,000 (cycles)
FLAME RESISTANCE	AS/NZS 1530.3	Report No. 22-000663
	AS/NZS 3837	Report No. 23-000576 – meets Group 2 Classification
ENVIRONMENTAL	CARE OF VINYL	
Produced at ISO 14001 facility	In case of slight stains, wipe the surface with damp cloth or a mild detergent and rinse with water. For localised and stubborn stains (oil, grease, cosmetics, coffee, liqueurs, chewing gum, etc.) it is advisable to follow the following instructions: promptly dissolve the stain with diluted ethyl alcohol (colourless liquid) in 20% water, dab and then treat with a solution of mild detergent, rinse well. It's recommended to use our proprietary SLF20 cleaner.	
Passes the standards for all European textile products environmental criteria, including free of Phthalates.		

---