



CORVINA

CORVINA IS A BIOBASED COATED VINYL WITH A SOFT HANDLE AND AN APPEARANCE SIMILAR TO REAL LEATHER, COMPOSED OF 57% ORGANIC PLANT MATERIAL DERIVED FROM WASTE PRODUCTS GENERATED DURING APPLE PROCESSING.



pelleleathers.com.au
+ 61 2 9460 9222

CORVINA COLOURS



APOLLO

6823



ATHENA

6809



AUBURN

6811




AURA

6807



BEETROOT

6827

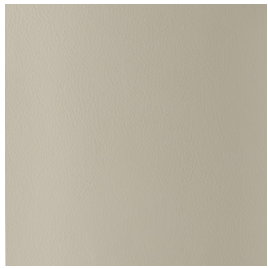

BEIS

6802



BELLONA

6803




BOHO

6820



BRIAR

6810



COUNTRY

6816



FEATHER

6800



GULF

6817



HERBS

6815



HERCULES

6824



JUNO

6805



KILT

6828



MANDORLA

6813



MARISOL

6806



MATCHA

6814




NOBEL

6818



PESCA

6812




POSEIDON

6822



ROMAN

6825



SERENITY

6819




THALASSA

6821




TURNIP

6801

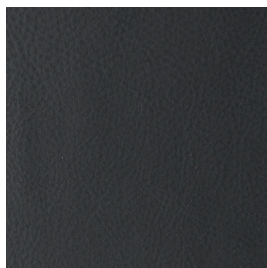


TUXEDO

6826

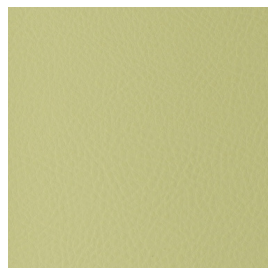

VEGANO


6804

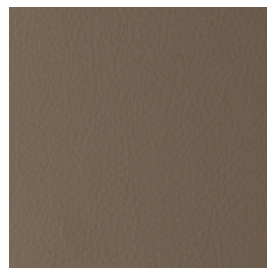

VESTA

6808

CORVINA PERFORATION OPTIONS

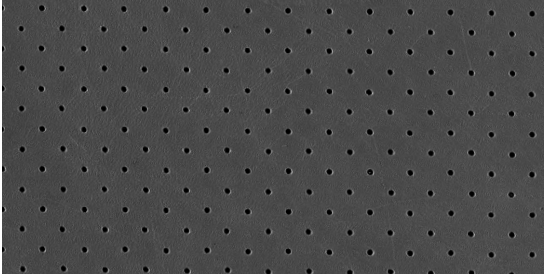

PINPOINT

CORVINA DETAILS

VINYL

Corvina is a bio-based coated vinyl with a soft handle and an appearance similar to real leather. Composed of 57% organic plant material, including biological plasticisers extracted from soybean plants and 7% apple fibre derived from waste generated during apple processing, its backing structure is made from certified organic cotton in accordance with the GOTS standard.

Production is completely free from phthalates, antimony trioxide, DMF and petroleum-based plasticisers, with a water-based, solvent-free polyurethane surface finish resistant to alcohol. Corvina complies with European REACH regulations on chemicals, while maintaining high flame-retardant properties. Available in 29 contemporary colours, it is suited to a variety of applications including commercial, hospitality and residential.

APPLICATIONS	Upholstery, Wall Panelling, Aviation, Railway
--------------	---

ROLL WIDTH	140cm
------------	-------

WEIGHT	650 +/- 10 g/m ²
--------	-----------------------------

COMPOSITION	76% PVC - 22% PES - 2% PU
-------------	---------------------------

CHARACTERISTIC	TEST METHOD	TEST RESULTS
----------------	-------------	--------------

ABRASION RESISTANCE	ISO 5470-2	60,000 (MARTINDALE)
---------------------	------------	---------------------

COLOUR FASTNESS TO DRY RUBBING	ISO 105-X12	4/5
--------------------------------	-------------	-----

COLOUR FASTNESS TO WEY RUBBING	ISO 105-X12	4/5
--------------------------------	-------------	-----

COLOUR FASTNESS TO LIGHT	ISO 105 Bo2	6
--------------------------	-------------	---

ADHESION	ISO 2411	> 30 (N)
----------	----------	----------

TENSILE STRENGTH	UNI EN ISO 1421	long. 600 trasv. 240 (N)
------------------	-----------------	--------------------------

ELONGATION AT BREAK	UNI EN ISO 1421	long. 57 Trasv. 110 (%)
---------------------	-----------------	-------------------------

TEAR STRENGTH	UNI EN ISO 4674	long. 30 trasv. 30 (N)
---------------	-----------------	------------------------

BENDING STRENGTH	UNI 4818-13	100,000 (cycles)
------------------	-------------	------------------

FLAME RESISTANCE	AS/NZS 1530.3	Report No. 22-000663
------------------	---------------	----------------------

	AS/NZS 3837	Report No. 23-000576 – meets Group 2 Classification
--	-------------	---

ENVIRONMENTAL	CARE OF VINYL
---------------	---------------

Produced at ISO 14001 facility

Passes the standards for all European textile products environmental criteria, including free of Phthalates.

In case of slight stains, wipe the surface with damp cloth or a mild detergent and rinse with water. For localised and stubborn stains (oil, grease, cosmetics, coffee, liqueurs, chewing gum, etc.) it is advisable to follow the following instructions: promptly dissolve the stain with diluted ethyl alcohol (colourless liquid) in 20% water, dab and then treat with a solution of mild detergent, rinse well. It's recommended to use our proprietary SLF20 cleaner.