



## MONZA

MONZA IS A HIGH-PERFORMANCE VINYL WITH A LEATHER GRAIN EFFECT AND AN EXPANSIVE, DIVERSE COLOUR PALETTE. ITS ELASTIC STRUCTURE ENABLES IT TO BE EASILY MOULDED AND ADAPTED TO VARIOUS UPHOLSTERY CONTOURS.

---

# MONZA COLOURS




ASTRO

4227



BOSCO

4226

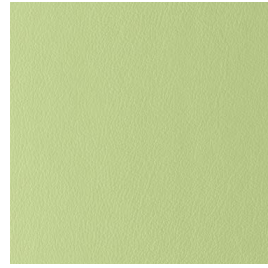


BREEZE

4206




CAVIAR

4224

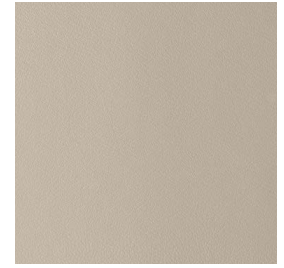

COYOTE

4218

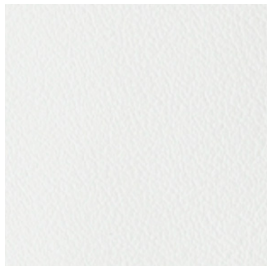

DEW

4217



DOMINO

4201



EAGLE

4207



GENIE

4219



HABITAT

4212




INFINITY

4203




LATITUDE

4209



MARLIN

4220



METRO

4221




MYSTIC

4216




NOMAD

4215



POOL

4223



PREHISTORIC

4210



QUANTUM

4225



SAMBA

4205




SCORCH

4211




SOLIS

4208



SPARTACUS

4214

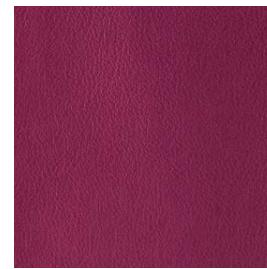


SYMPHONY

4222



TANGO

4202

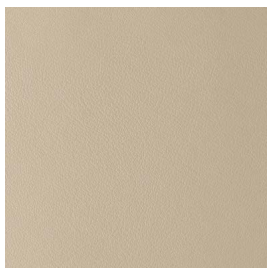


TWILL

4204



VIKING


4228

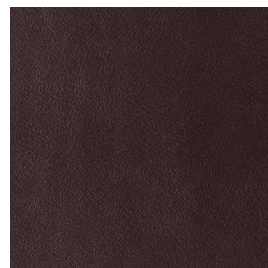

WINTER

4213

## MONZA PERFORATION OPTIONS

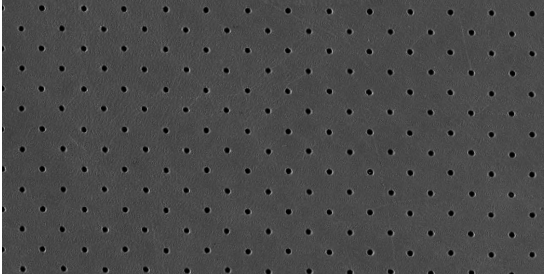

PINPOINT

# MONZA DETAILS

## VINYL

Monza is a high-performance vinyl with a leather grain effect and an expansive, diverse colour palette. Its elastic and technical structure enables it to be easily moulded and adapted to various upholstery contours.

Monza is ideally suited to a variety of applications, including high-traffic public spaces, workplace, hospitality, aged care and education. The range features antibacterial and anti-mould protection with high lightfastness.

---

APPLICATIONS	Upholstery, Aviation, Healthcare, Marine, Railway, Wall Panelling
ROLL WIDTH	140cm+2%
WEIGHT	600+3% g/m <sup>2</sup>
COMPOSITION	72% PVC - 25% COT - 3% PU

---

CHARACTERISTIC	TEST METHOD	TEST RESULTS
ABRASION RESISTANCE	EN ISO 5471-2	100,000 (MARTINDALE)
COLOUR FASTNESS TO DRY RUBBING	UNI EN ISO 105-X12	5
COLOUR FASTNESS TO WEY RUBBING	UNI EN ISO 105-X12	5
COLOUR FASTNESS TO LIGHT	UNI EN ISO 105-B02	6/7
ADHESION	UNI EN ISO 2411	> 40 (N)
TENSILE STRENGTH	UNI EN ISO 1421	long. 400 trasv. 200 (N)
ELONGATION AT BREAK	UNI EN ISO 1421	long. 57 Trasv. 110 (%)
TEAR STRENGTH	UNI EN ISO 4674 -1	long. 70 trasv. 60 (N)
BENDING STRENGTH	UNI 4818-13	100,000 (cycles)
FLAME RESISTANCE	AS/NZS 1530.3	Report No. 25-001024
	AS/NZS 3837	Report No. 25-001027 – meets Group 2 Classification

---

### ENVIRONMENTAL

Produced at ISO 14001 facility

Passes the standards for all European textile products environmental criteria, including free of Phthalates.

---

### CARE OF VINYL

In case of slight stains, wipe the surface with damp cloth or a mild detergent and rinse with water. For localised and stubborn stains (oil, grease, cosmetics, coffee, liqueurs, chewing gum, etc.) it is advisable to follow the following instructions: promptly dissolve the stain with diluted ethyl alcohol (colourless liquid) in 20% water, dab and then treat with a solution of mild detergent, rinse well. It's recommended to use our proprietary SLF20 cleaner.