



## TOLEDO

AN EXQUISITE VACUUM DRIED ANILINE LEATHER WITH A  
SOFT WAXED SURFACE.




[pelleleathers.com.au](http://pelleleathers.com.au)  
+ 61 2 9460 9222

# TOLEDO COLOURS



ADMIRAL 4519



AFRICAN 4529



ANCHOR 4532




ARUNA 4512




ARGILLA 4541



BUFF 4504




CARNIVAL 4511



CHORIZO 4528




CORDYLINE 4538




CHURROS 4503




CIDER 4502




DIM 4520



DORADO 4506




FLANNEL 4540




GARNET 4507




GRAIN 4536



GAZPACHO 4509




GRANA 4514



HIGHWAY 4521



IMPERIAL 4510



JUNGLE 4525



JUNIPER 4518




KATOOMBA 4542




KURRAJONG 4537




LEPRECHAUN 4524




PAELLA 4526




PINDAN 4539



PLATEADO 4531



RAVEN 4533




RATTAN 4535

# TOLEDO COLOURS



ROSA

4515




SCHNAPPS

4508



SHEPARD

4522



SPRING

4523



SUMMER

4505



THYME

4534



TORTILLA

4501




ULTRA

4517



UNIVERSE


4516




VILLAGE

4527

## TOLEDO PERFORATION OPTIONS

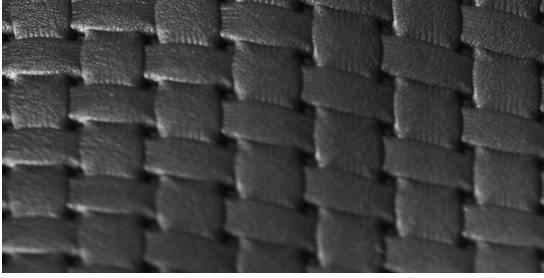

BASKET WEAVE

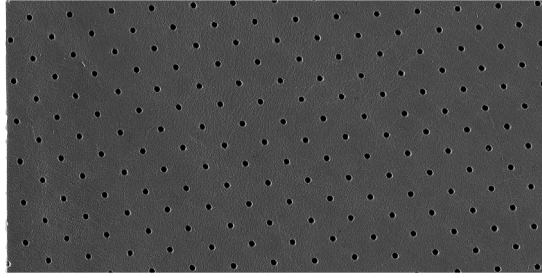

PINPOINT

# TOLEDO DETAILS

## SMOOTH GRAIN, ANILINE

Toledo is an exquisite vacuum dried Aniline leather with a soft waxed surface that is instantly alluring in both handle and appearance. Produced on the finest of European raw material and with an extensive and diverse colour palette, Toledo is sure to attract the most discerning of specifiers. Age and wear will only enhance this leather.

---

APPLICATIONS	Upholstery, Wall Panelling, Curtain
HIDE SIZE (IN SQM)	4.5 - 5.5
THICKNESS (IN MM)	1.0-1.2

---

CHARACTERISTIC	TEST METHOD	TEST RESULTS
COLOURFASTNESS TO LIGHT	EN ISO 105-B02	≥3
COLOUR FASTNESS TO RUBBING	EN ISO 11640	Dry ≥3
	EN ISO 11640	Wet ≥3
	EN ISO 11641	Perspiration ≥3
FLEXING ENDURANCE	EN ISO 5402	30,000 flexes
TEAR STRENGTH	EN ISO 3377-1	≥ 20 N
LIGHT FASTNESS	EN ISO 105-B02	6
FINISH ADHESION	EN ISO 11644	2.00 N/cm
FLAME RESISTANCE	AS 1530.3	

EN 1021: 1 and EN 1021 :2

---

### ENVIRONMENTAL

- Fulfilled Blue Angel ecolabel VOC test \*by TUV Rheinland
- All wastewater is cleaned in a biological treatment plant, recycled and reused. No PCP, Chrome VI, CADMIUM, FORMALDEHYDE or AZO – Col Dyes are used in the tanning process. All dyes and pigments (finishes) are solvent free i.e. water based
- State of the art application technology optimizes the finishing process and greatly reduces the rate of airborne emissions.
- Regular inspections are conducted to ensure that quality and environmental standards are maintained at all times.
- Low VOC product.

---

### CARE OF LEATHER

- Do not place leather in direct sunlight.
- Ensure a minimum of 80cm between furniture and heating source.
- Avoid contact of leather with sharp objects.
- Regularly clean and dust your leather with a clean dry cloth.
- Remove food spills immediately. Do not scrub hard.
- Avoid using harsh chemicals and / or cleaners that are oil or solvent based.
- Only clean leather with approved upholstery leather cleaners in accordance with the manufacturer's instructions.